

4 ZONE CENTRAL UNIT IN METAL BOX

AE/C5-4M

Description


Microprocessed centrals of attractive design, according to EN 54 parts 2 and 4.

They have:

- 2 conventional detection loops with active end of line.
- Access level control by key.
- 2 monitored evacuation exits.
- Fire relay (general alarm).
- General fault relay.
- 24 Vdc auxiliary output.
- Keyboard with 6 keys for operation.
- "Zone test" mode.
- Individual connection / disconnection of detection zones and evacuation zones.
- 10 independent LEDs for alarm indication.
- They need a single 12V / 7Ah battery.
- Perform continuous monitoring of the entire system: battery status, CPU failure, loop status, loop power, power supply status, siren monitoring, ground fault, siren loop status .



Wiring diagram

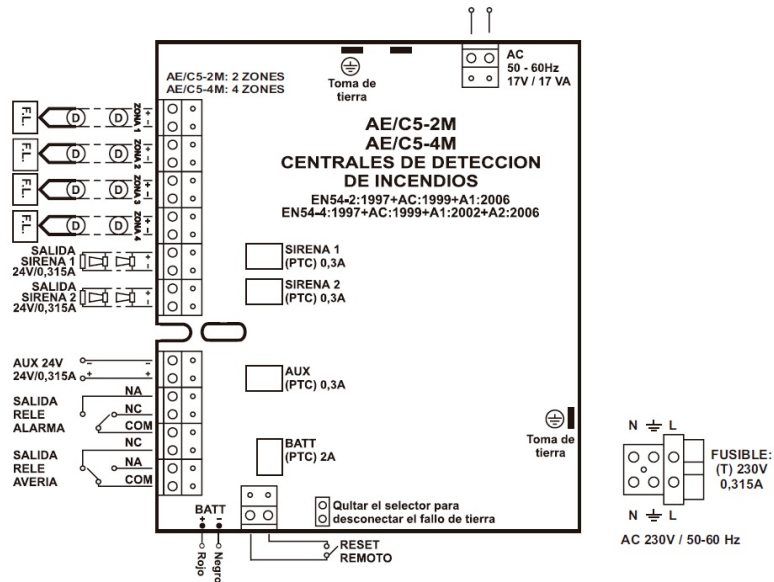

TECHNICAL CHARACTERISTICS

Max. detectors per zone:	Up to 20 conventional detectors Unlimited number of buttons
Zone thresholds	<ul style="list-style-type: none"> • 0 - 2 mA Open circuit fault. • 2 - 6 mA Standby. • 6 - 105 mA Alarm. • 120 - Short circuit Short circuit fault.
Mains supply	230 Vac \pm 10% Fuse 0.315A
Battery:	1 x 12V (24V) 7Ah Lead-acid sealed. Fuse 2A.
Output current (with charged batteries)	0.7 A
Battery power consumption in mains failure condition	50 mA
Departures	<ul style="list-style-type: none"> Siren Circuit 1 24V, Fuse 0.3A Siren Circuit 2 24V, Fuse 0.3A

Fire and Breakdown Relays	Voltage-free contacts 12V / 1A or 24V / 0.5A Maximum voltage 125V 2A maximum current
Auxiliary Output	24Vdc - Fuse 0.3A
Wiring Zones	2 X 1.5 mm ²
Environmental Conditions	T ^a work -5 to 40°C Storage temperature -20 to 60°C Humidity 0 to 95% (no condensation)
Dimensions:	340x290x100mm
Weight:	2,5Kg

