

Central unit for 1 remote sensor

AE/GI-SE148K



Description

Central realized with microprocessor technology and printed circuits are SMD assembled.

External gas sensor to be installed in the conform place to detect gas.

- Display by the LED bar placed at the front of the device
- N° 3 relays for alarm and fault
- TEST function
- RESET function
- N° 1 AUX input for electrovalves with magnetic sensor

Technical Characteristics

Power supply: 230Vca 50-60Hz

Installation: A parete

Absorption: 3,5 VA



Alarm level: 10% LIE - 20% LIE

Measuring range: 0 - 20% LIE

To be connected to a remote sensor

A led bar indicate the reached gas concentration

N. 3 safety positive relay with alarm memory

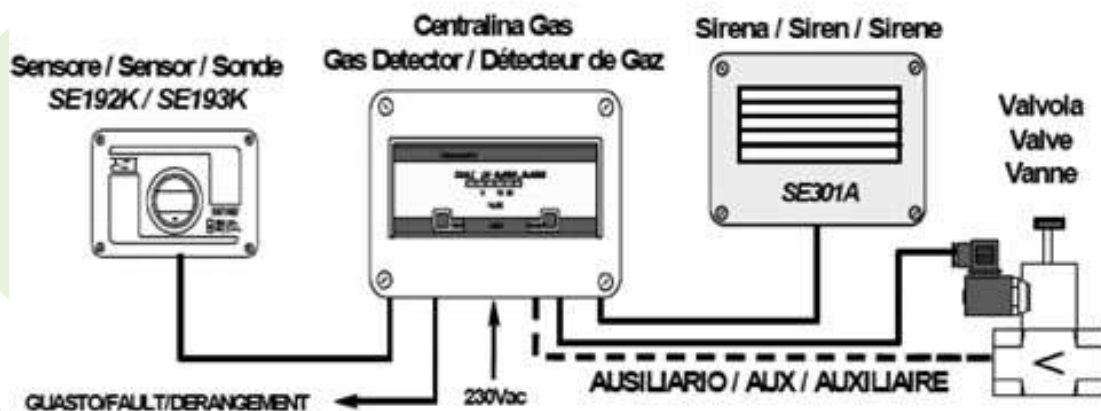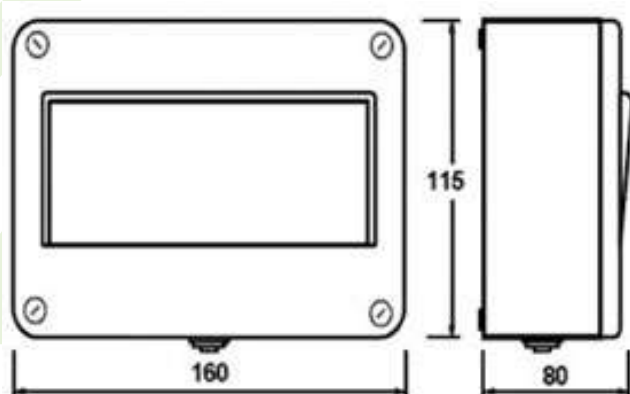

AE/GI-SE148K