

# Are you sure that you're secure?




## **TITANUS RACK-SENS®**

Earliest possible fire detection and extinguishing system for server racks and control cabinets – ultra compact, for maximum protection!

**19"**

**WAGNER®** 

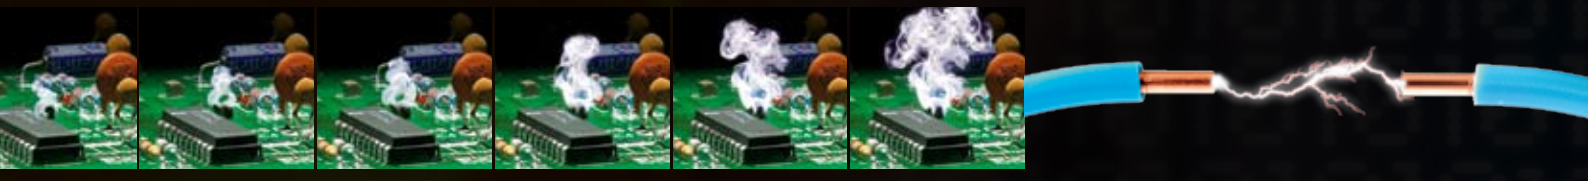


## Little cause – big impact!

### **Data loss, business interruption and -termination!**



The permanent availability of digital data is an absolute MUST for any company! In May 1998 the »Control and Transparency in Business Act« (KonTraG) was introduced in Germany and internationally the standard »Basel II« was created to require a monitoring system for the early detection of potentially existence-threatening events. This results in the absolute necessity to adequately protect electronic data processing (EDP) hardware and software in relation to the risk scenario.

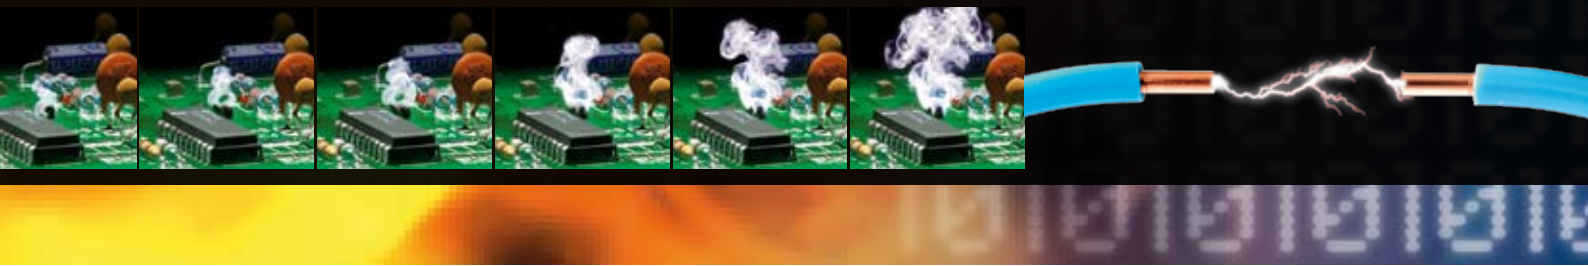

## Little cause – big impact!

### Corrosion damages hardware components.

It is generally known that the development of fire in electronic cabinets and racks is typically caused by smouldering or slow burning fires. The reasons for this are usually faulty contacts and defective components. If such fires are not detected at a very early stage, e.g. on a printed circuit board, they will lead to soot-ing and corrosion of the surrounding hardware. Aggressive fumes can damage entire control cabinets and server racks, accompanied by the loss of non-retrievable data.

### New problems require new solutions.

Self-contained air-conditioned server rack/control cabinet systems cannot be sufficiently protected using conventional fire protection equipment. Fire detection outside cabinets or racks will respond far too late; the damage to the sensitive EDP equipment can already have reached an incalculable extent when the alarm is signalled!


### End of business operations faster than anticipated.

The dependence of companies on their EDP represents a potentially existence-threatening risk that cannot be calculated. According to a study carried out by Gerling Insurance, trading companies »survive« after a total failure for 2.5 days, banks for 2 days and just-in-time suppliers for 24 hours at the most.

### Three decisive days!

The risk potential in the first three days and total failure of the EDP have drastically increased over the last years. According to Debis, the number of companies forced to close after 3 days has almost doubled from 1998 (28 %) until 2006 (51 %).

Survival duration of companies after a total failure of the IT-System

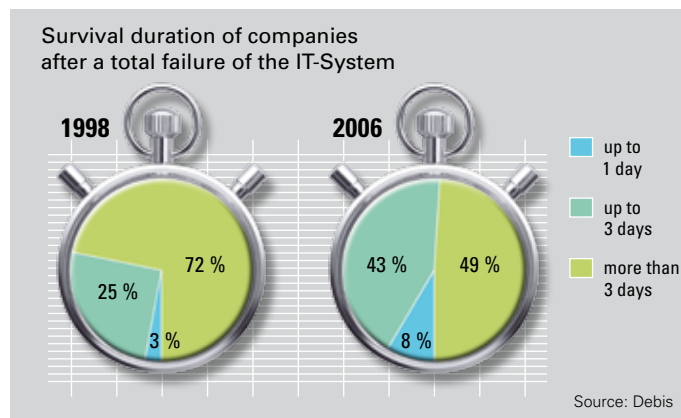



## TITANUS RACK-SENS®



Advantage in time – to maximise your safety level!

### 3-Stage Safety Concept!



#### 1 Earliest, highly sensitive smoke detection

Maximum time advantage is required for minimisation of fire damage.

#### 2 Automatic system shut down

Safest alternative against the spread of fire. The necessary energy to support the fire is withdrawn.

#### 3 Optimum gas extinguishing

Extinguishing exactly where the fire started.



# TITANUS RACK-SENS®

## Advantage in time – to maximise your safety level!

### Safety according to standard.

Classes »A« and »B« of the new European standard EN 54-20 for the first time offer the possibility of clearly categorising the suitability of a warning device for earliest fire detection.

Thus: The extreme smoke dilution at high air speed requires a yet increased sensitivity for earliest possible fire detection (see chart).


### Time gain – time advantage.

The time gained by earliest fire detection depends on the fire scenario. The slow fire development in electrical control cabinets offers potential for a time advantage of many minutes or even


hours. In order to minimise the fire damage, this valuable time must then be used by the immediate initiation of countermeasures.

**More transparency in order to qualify earliest fire detection** by utilising the new classification classes »A« and »B« in accordance with DIN EN 54-20.

Detector sensitivity for cabinet protection depending on the fire scenario and air dilution (air conditioning).

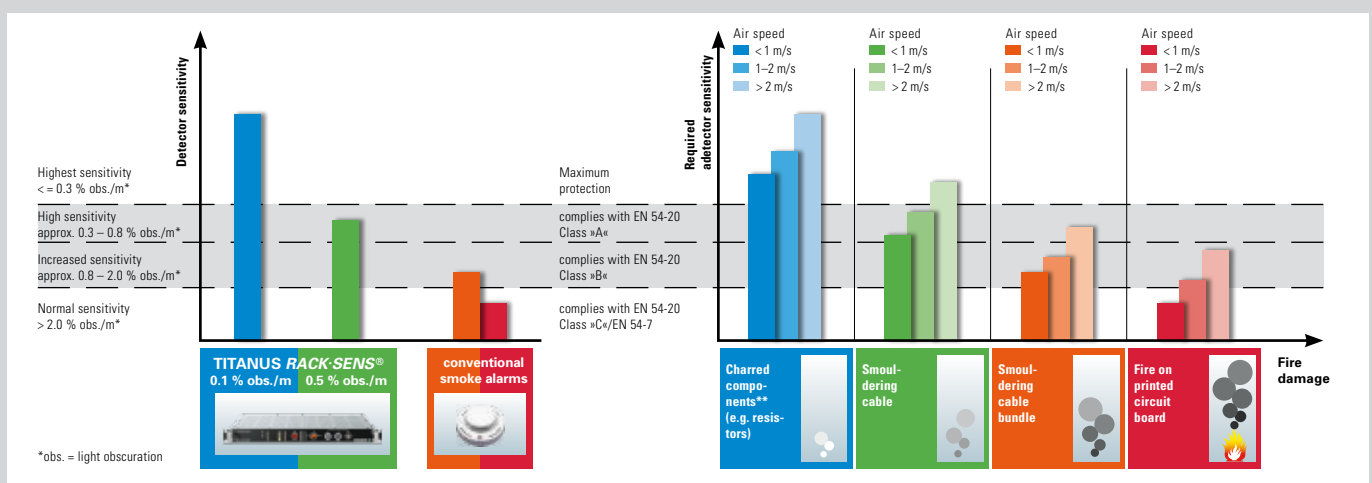

\*\* design concept to be in accordance with the technical manual TITANUS RACK-SENS®

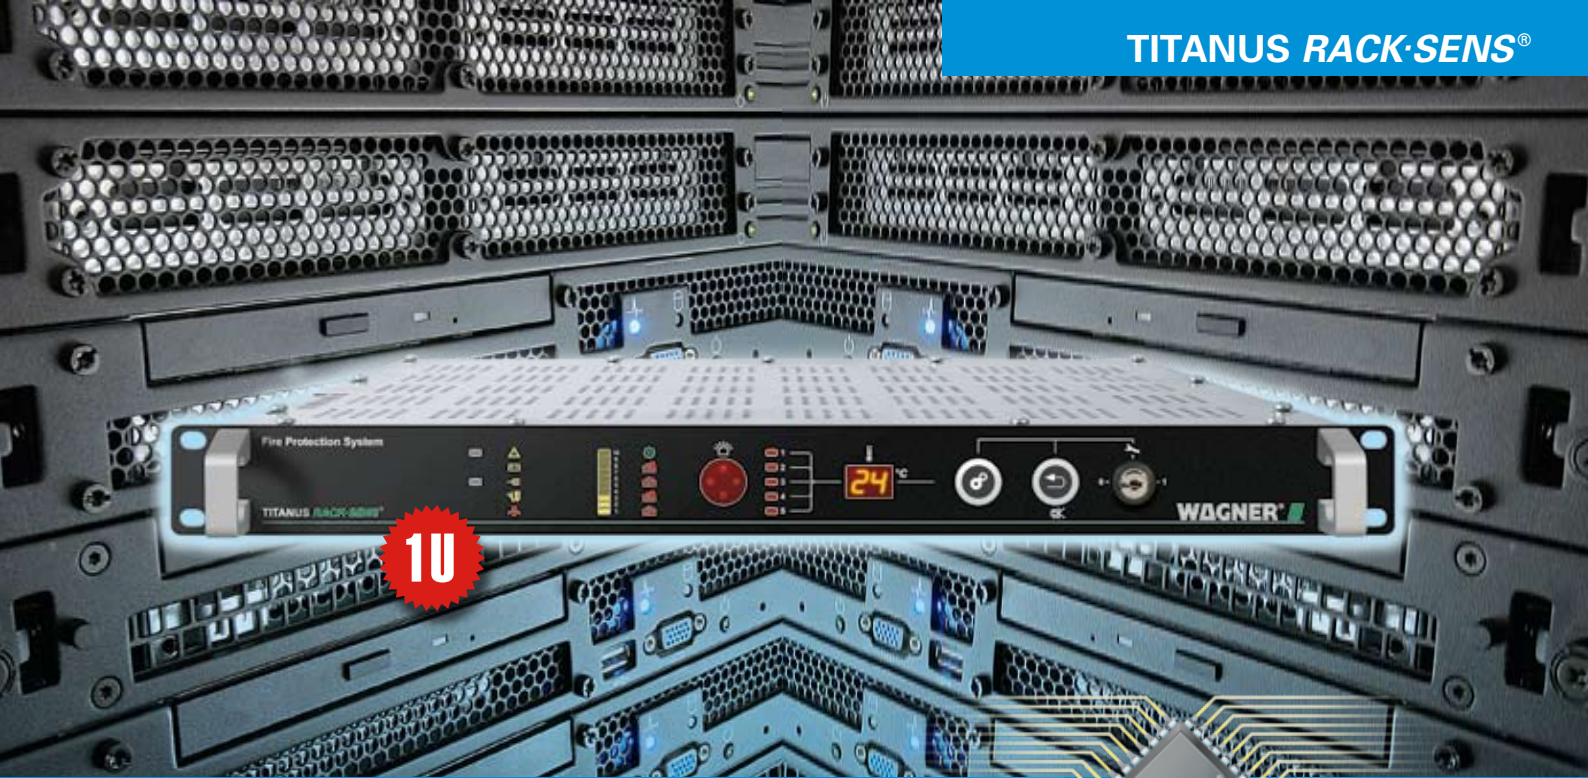

## TITANUS RACK-SENS®


Top innovations  
to enhance your safety!

### Leading edge technology

- ◆ ultra-flat high-tech fire protection starting with 1 U -19" format
- ◆ full compliance with sensitivity classes A and B in accordance with european standard EN 54 Part 20, tested by VdS\*\*
- ◆ integrated fire detection and extinguishing in one compact unit (2 U)
- ◆ earliest possible detection by air sampling smoke detection
- ◆ high immunity to false alarms due to intelligent signal processing via LOGIC-SENS
- ◆ networkable for Ethernet via OPC-Server
- ◆ interactive diagnostic tools allow interruption-free maintenance
- ◆ future-proof and extendable due to high degree of modularity
- ◆ easy to install – quick maintenance turnaround times
- ◆ on-cabinet version available for retrofitting of existing systems



\*\* VdS = Organization of Property Insurers

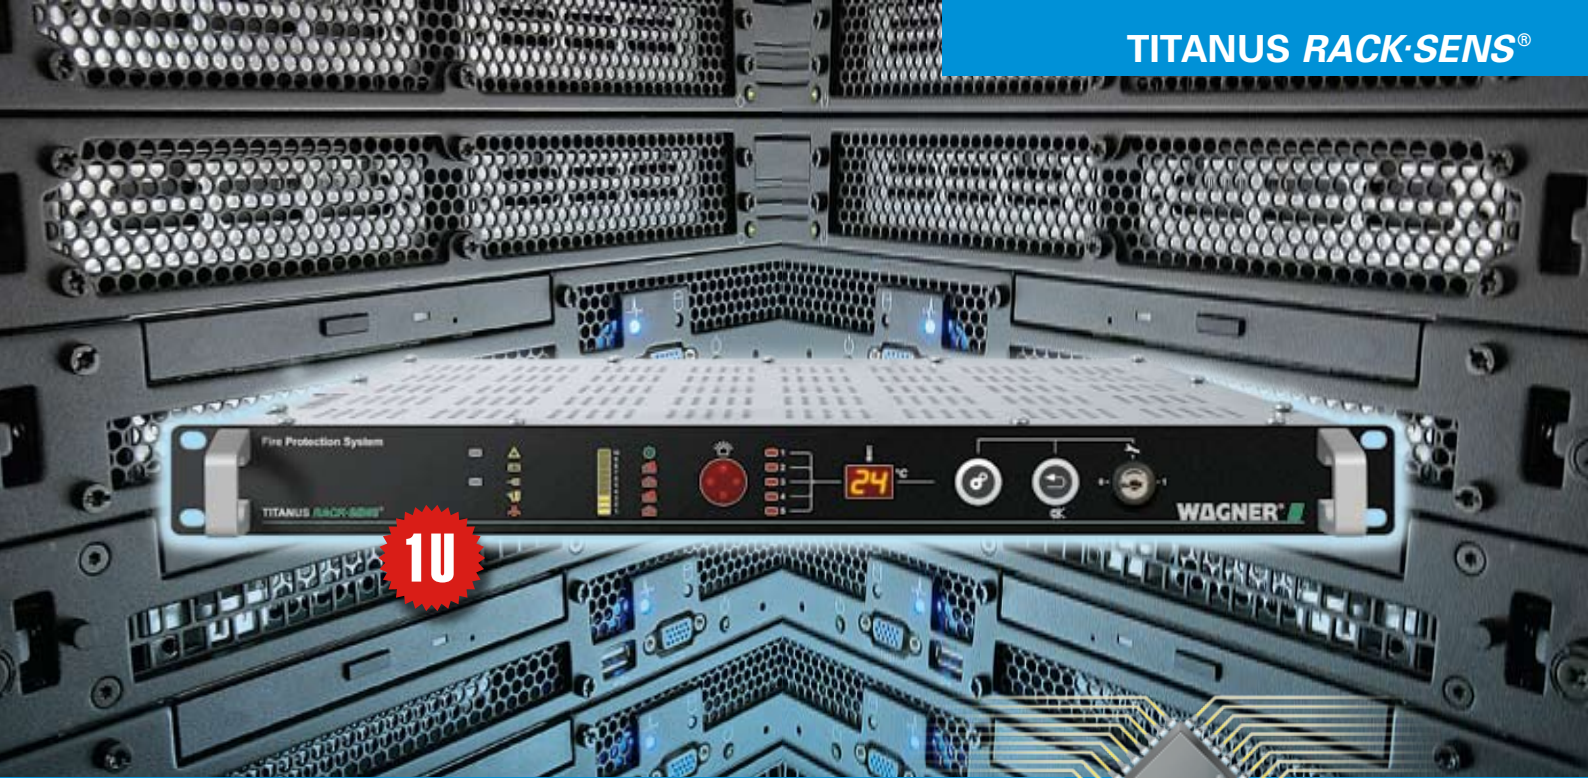

## TITANUS RACK-SENS®



Top innovations  
to enhance your safety!

**Fire protection in its most compact form for network cabinets, switch gear and server racks.**

**Compact and space-saving, innovative technology with very little demands for space.**

Especially designed for EDP cabinets, server racks and control cabinets, **TITANUS RACK-SENS®** presents an extremely cost-effective fire protection solution for 19"-cabinets and racks. The integration into existing and new systems is easily achieved due to modular technology. Its use in high density data centres for local high sensitive fire detection and for the initiation of counter-active measures is imperative.

**Well proven technology, even in most difficult situations.**

Only a highly sensitive air sampling smoke detection system can comply with the highest requirements in fire detection, especially under the most adverse conditions, e.g. at high air speeds and with the associated intensive smoke dilution.

**Designed for:**

- ◆ network cabinets and server racks
- ◆ telecommunication cabinets
- ◆ control switch cabinets
- ◆ low-voltage cabinets



Application examples



**Compact solution with minimum space requirement**  
**TITANUS RACK-SENS® 1 U**  
 – fire detection



**Compact solution with external extinguishing**  
**TITANUS RACK-SENS® 1 U**  
 – fire detection and optional extinguishing with external extinguishing cylinder



**Maximum protection with integrated extinguishing**  
**TITANUS RACK-SENS® 2 U**  
 – fire detection and extinguishing in one unit

Advanced technology  
 – flexible and economic!



**TITANUS RACK-SENS®**

**Earliest fire detection and extinguishing in 19" format**

Network cabinets, server racks and control cabinets are often de-centrally positioned and mainly perform their essential services for the company and the working process without supervision. In the case of fire, however, this can have fatal, business threatening consequences. Right here is where the fire protection concept of **TITANUS RACK-SENS®** comes into focus: The air sampling smoke detection system already detects very small amounts of smoke fumes, which are usually present during the earliest phases of a developing fire. This creates a valuable time gain, which is absolutely essential for the initiation of counter-

active measures such as »soft« power-down, data relocation, selective shut downs and/or extinguishing.

**Suitable for any situation**

The high degree of modularity ensures the individual adaptation to the respective safety requirements and the existing infrastructure, while providing excellent economic properties.

**Plug & Play**

The time requirement for installation and commissioning is reduced to a minimum due to a pre-engineered configuration.

**Efficient**

Smoke- and temperature monitoring, object shut down and integrated or external extinguishing solutions are available for up to 5 adjacent server racks or control cabinets.



**VisuLAN® T**

Intelligent software allows to display all networked units within a layout of the protected building and for the visualisation of device-specific status messages.






**Manifold extension possibilities**

**TITANUS RACK-SENS® 2 U**

- for extending the protected volume
- up to 4 extension modules (without detection)

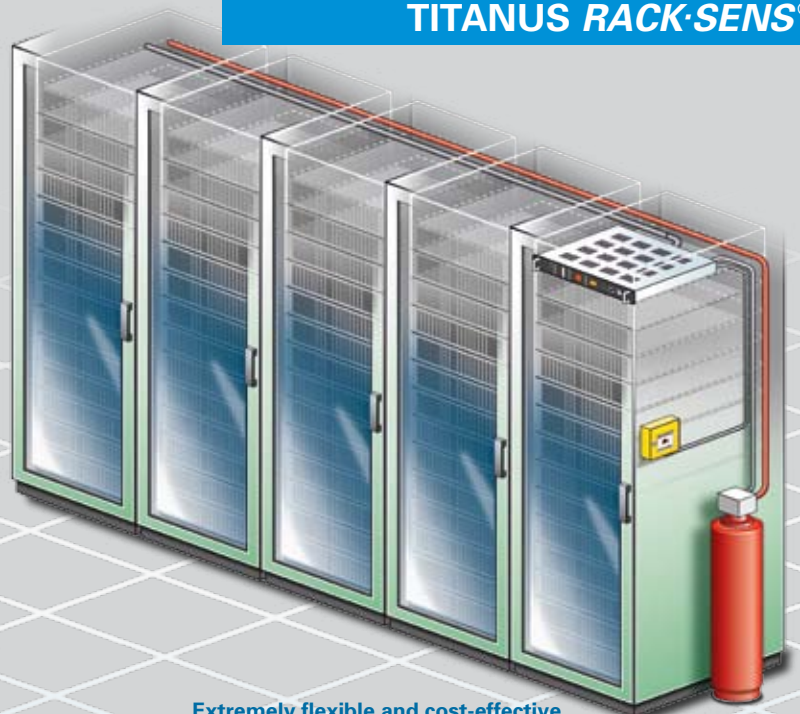

**Extremely flexible and cost-effective**

**TITANUS RACK-SENS® 1 U**

- maximum extinguishing capacity
- minimum space requirements
- wide selection of extinguishing agents

## Advanced technology – flexible and economic!



**High sensitivity**

Extremely high immunity to false alarms due to intelligent signal processing with **LOGIC-SENS** by being at the same time up to 400-times more sensitive than conventional smoke detectors.

**»Tailor-made«**

Individually configurable to customer requirements or a feature set required for the application. You only pay for what you really need.

**Easy to service, retrofittable**

Easily extendable and configurable. In order to retrofit existing cabinet systems, **TITANUS RACK-SENS®** – units are available as on-cabinet versions.

**Dual detector dependency**

In order to comply with the highest safety class requirements for shut down and extinguishing, a second detector is optionally available.

**System shut down**

Step by step »soft« shut down for data relocation, run-down and de-energising: The necessary support energy for maintaining and spreading the fire is withdrawn.

**Gas extinguishing**

Innovative gas extinguishing, optionally either integrated or as an external solution, even for larger volumes. Not only conventional, but also modern extinguishing agents are available, which are especially approved for application in the IT area and are preferentially used worldwide.

**Communicative**

Integration in existing alarm- and building management systems is provided via OPC-server. Visualisation of all parameters via remote diagnostics and remote maintenance. Status and event messages can be displayed via the innovative visualisation software **VisuLAN® T**.

**PIPE-GUARD**

Permanent monitoring of the air sampling pipe network and continuous supervision of the integrated air flow sensor. An additional plus in safety!

**Options**

Network ability, manual release, AC-power supply version (mains 100 – 240 Volt) with battery back-up for 4 hours, bargraph (smoke level indicator) and temperature monitoring for up to 5 individually selectable temperature sensors.

Product portfolio

**Configurations for all requirements**

The basic version of the pre-configured units already complies with the high demands on earliest fire detection.

The fully featured version of the TITANUS RACK-SENS® satisfies even most demanding customer requirements regarding air sampling smoke detection- and display technology. Additionally an improved safety concept is included.

1U



**TITANUS RACK-SENS® 1 U basic unit**

- 24 V supply
- pre-alarm
- integrated air sampling smoke detection system with 1 detector
- 5 programmable relays

1U



**TITANUS RACK-SENS® 1 U full featured**

- based on basic 1 U unit, but equipped with individual configurable options:
- AC mains (100 – 230 V), 4 h battery backup
  - temperature monitoring for up to 5 sensors
  - bargraph (smoke level indicator)
  - network module
  - 2nd Detector (incl. 2nd pre-alarm)

2U



**TITANUS RACK-SENS® 2 U basic unit**

- based on basic 1 U unit, but additionally equipped with:
- 1 or 2 (optional) extinguishing cylinders
  - monitored output for shut down relay
  - pre-configured for connection of extinguishing fan to improve extinguishing hold time after release of the extinguishing agent

2U



**TITANUS RACK-SENS® 2 U full featured**

- detection features as full featured 1 U unit
- extinguishing features as 2 U basic unit

2U




**TITANUS RACK-SENS® 2 U extension unit**

- for extension of the extinguishing capacity
- without detection, extinguishing features as 2 U basic unit
  - connection via 2-wire bus and 24 V supply



## Real innovation lies within the details!

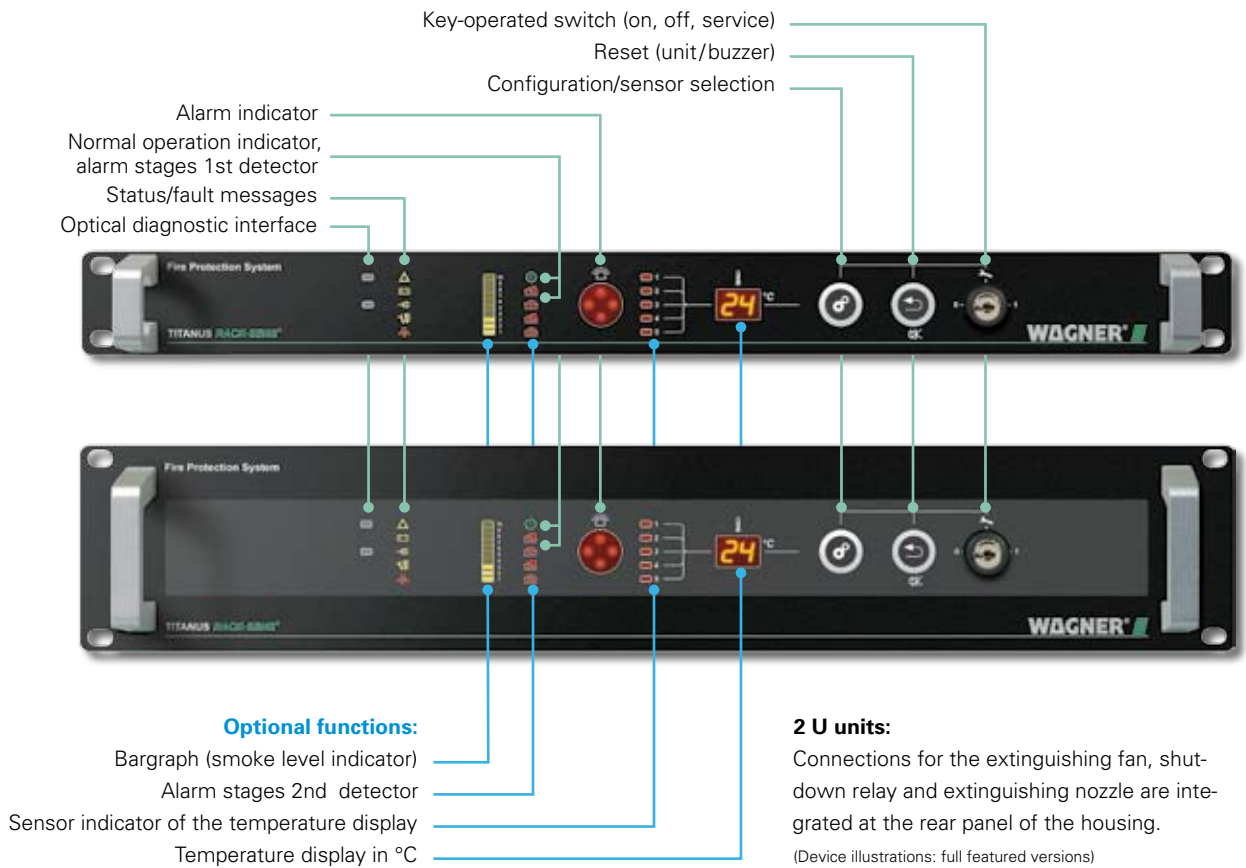

## Technical data

Joint performance  
characteristics 1 U and 2 U  
units

Supply voltage	24 V DC (15 to 30 V) or 100 to 240 V AC*
Battery backup	for max. 4 hours (with 100 – 230 V mains operation)*
Displays (full featured unit )	<ul style="list-style-type: none"> <li>– fault</li> <li>– battery malfunction*</li> <li>– mains malfunction*</li> <li>– service / blocked</li> <li>– extinguishing released</li> <li>– bargraph (smoke level indicator)</li> <li>– operation</li> <li>– pre-alarm, main alarm per detector*</li> <li>– alarm indicator</li> <li>– temperature display* (for up to 5 cabinets)</li> </ul>
Operating elements	Button for: <ul style="list-style-type: none"> <li>– reset</li> <li>– buzzer off</li> <li>– configuration</li> <li>– sensor selection for temperature monitoring</li> </ul> Key-operated switch for: <ul style="list-style-type: none"> <li>– on, off</li> <li>– service (isolate)</li> </ul>
Alarm sensitivity	0.1* or 0.5 – 2.0 % obs./m
Alarm stages	2 (main alarm and pre-alarm) per detector
Number of protected cabinets max.	5 (according to VDE 0833)
Optical interface	infrared interface for diagnostic tool
Sensor temperature range	0 – 80 °C (extendable temperature range optional)
Terminal connections	10 x 0.5 mm <sup>2</sup> to 2.5 mm <sup>2</sup>
Pipe connection	conical plug-in pipe connection for Ø 25 mm
Total pipe length max.	15 m
Number of air sampling holes max.	10
Pipe monitoring system for blockage or breakage	via integrated air flow sensor
Housing material	steel sheet, galvanised
Colour (front)	RAL 7021 black-grey
IP-rating (EN 60 529)	IP 20

\* Depending on the individually selected feature set, excerpt from the technical manual TITANUS RACK·SENS®

## Technical data


**Performance characteristics**
**1 U unit**
**1U**

Power consumption standby (at 24 V)	135 mA* – 330 mA*
Power consumption alarm (at 24 V)	235 mA* – 515 mA* (plus 250 mA per extinguishing fan)
Monitored inputs/outputs	<ul style="list-style-type: none"> <li>– door contact</li> <li>– reset (reset input)</li> <li>– max. 5 temperature sensors*</li> <li>– manual release</li> <li>– data A/B bus connection and 24 V supply for external modules</li> <li>– network*</li> </ul>
Potential-free relay outputs	<ul style="list-style-type: none"> <li>– pre-alarm, main alarm per detector*</li> <li>– fault</li> <li>– max. 5 programmable relays</li> <li>– extinguishing released</li> <li>– service (isolate)</li> </ul>
Max. contact load alarm/fault relay	1 A/30 V DC
Extinguishing	via external extinguishing module* and external extinguishing cylinder
Object shut down	via external extinguishing module or shut-down module
Weight (full featured)	approx. 6.4 kg*
Dimensions (H x W x D mm)	43.6 x 483 x 300, 19" in-cabinet (1 U)
Minimum required installation depth	approx. 400 mm


**Performance characteristics**
**2 U unit**
**2U**

Power consumption standby (at 24 V)	155 mA* – 350 mA*
Power consumption alarm (at 24 V)	255 mA* – 535 mA* (plus 250 mA per extinguishing fan)
Monitored inputs/outputs	<ul style="list-style-type: none"> <li>– door contact</li> <li>– reset (reset input)</li> <li>– max. 5 temperature sensors*</li> <li>– extinguishing fan</li> <li>– shut down relay</li> <li>– manual release</li> <li>– data A/B bus connection and 24 V supply for external modules</li> <li>– network*</li> </ul>
Potential-free relay outputs	<ul style="list-style-type: none"> <li>– pre-alarm, main alarm per detector*</li> <li>– fault</li> <li>– max. 5 programmable relays</li> <li>– extinguishing released</li> <li>– service (isolate)</li> </ul>
Max. contact load alarm/fault relay	1 A/30 V DC
Extinguishing cylinder	integrated
Extinguishing agent container volume	max. 2 x 2 litres
Extinguishing agent	FM-200 (HFC-227ea) or Novec™ 1230 or 3M™
Object shut-down	integrated control for external relay
Weight (full featured)	approx. 32 kg*
Dimensions (H x W x D mm)	88.1 x 483 x 670, 19" in-cabinet (2 U)
Minimum required installation depth	approx. 900 mm

\* Depending on the individually selected feature set, excerpt from the technical manual TITANUS RACK-SENS®  
 3M and Novec are registered trademarks of the 3M Company



**PREVENTION** **OxyReduct®**

Actively prevents the development of fire.  
OxyReduct® is the new innovative way in fire protection.

**DETECTION** **TITANUS®**

Earliest fire protection due to very high sensitive air sampling  
smoke detection combined with high immunity to false alarms.

**SUPPRESSION** **FirExting®**

Fixed fire extinguishing systems with various  
gaseous extinguishing agents.

**COORDINATION** **VisuLAN®**

Visualisation and control of important system data combined with multiple diagnostic  
and messaging functions integrated into a powerful building management system.



**WAGNER Alarm- und Sicherungssysteme GmbH**

Germany, Headquarters  
+49 511 97383-100  
www.wagner.de

WAGNER Austria GmbH  
+43 2262 64262-0  
www.wagner-austria.com

WAGNER Nederland B. V.  
+31 30 2200264  
www.wagner-nl.com

WAGNER Asia Ltd. (Beijing)  
+86 755 86221023  
www.wagner-asia.com

WAGNER UK Ltd.  
+44 870 3336116  
www.wagner-uk.com

WAGNER Ltd. (Dubai U.A.E.)  
+971 43097901  
www.wagner-arabia.com

WAGNER Asia Ltd. (Shenzhen)  
+86 755 86221021  
www.wagner-asia.com