



OPTICAL / ACOUSTIC EXTINGUISHING SIGNAL CO AE/V-CECO

Description

Luminous panel with five high-efficiency LEDs.
Equipment for surface mounting.
Low current consumption.
Polarity reversal protection.
Fuse for power protection.

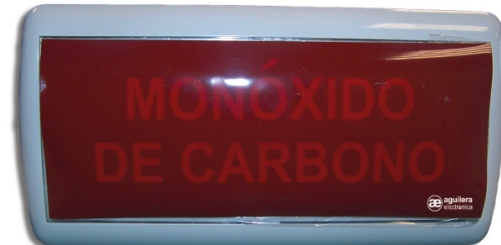

Dimensions

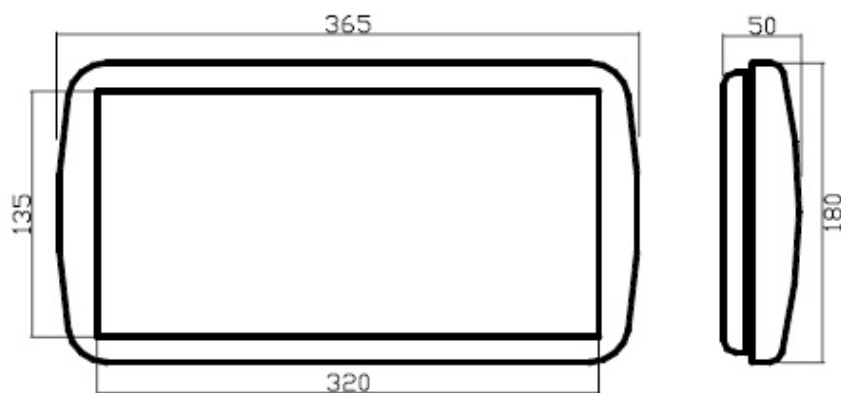

TECHNICAL CHARACTERISTICS

Buzzer: (98 dB at 1m 3200 Hz).
Programming: by jumpers.
Connection terminals: for 2.5 mm² section cable.
Protection: reverse polarity.
Fuse: for power protection.
Light: flashing or steady (two alarm levels).
Sound: intermittent or steady.
Current: constant with variable luminosity.
Power supply: from 10.8 Vdc to 28 Vdc.
Operating temperature: -10 ° C to + 50 ° C.
Flicker frequency: 1 Hz.

CERTIFICATIONS

