


TRIP HOSE

LD18, LD18-500, LD18BP and LD18BPP

Reference	Length	Hose diameter	Hose type	Max. work pressure	Connector 1	Connector 2
LD18	400 mm.	3/16"	EN 853 1SN	250 Bar	G 1/8"	G 1/8"
LD18-500	500 mm.	3/16"	EN 853 1SN	250 Bar	G 1/8"	G 1/8"
LD18BP	700 mm.	3/16"	EN 853 1SN	250 Bar	G 1/8"	G 1/8"
LD18BPP	2000 mm.	3/16"	EN 853 1SN	250 Bar	G 1/8"	G 1/8"

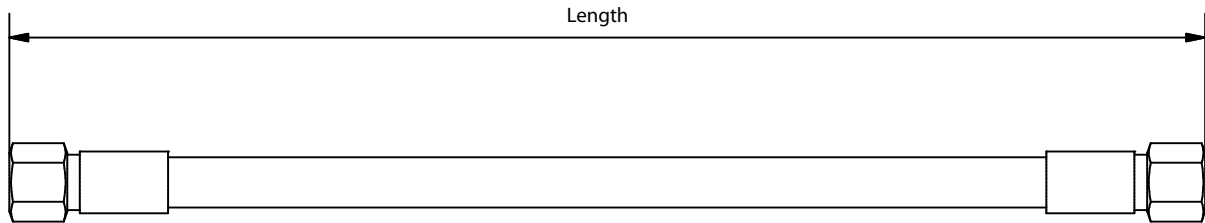

Specifications	
Name	Value
Connectors type	Hembra loca con asiento cónico
Connector material	Carbon Steel
Connector finish	zincado


 Av. Alfonso Peña Boeuf, 6 y 9
 28022 MADRID - ESPAÑA
 TEL: +34 913121656
 FAX: +34 913295820

 DATA SHEET
 TRIP HOSE

Description: Firing hoses are used to lead gas from the pilot cylinder to the pneumatic actuators of the slaves.

Token code:	Family tab:	Reference:	Drawn:	Date:	Reviewed:	Date:	Revision:	Format:
AEX-FTC-04-052	HFC 227 ea	VER TABLA	DCM	29/09/2017	MRC	29/09/2017	1	A4