
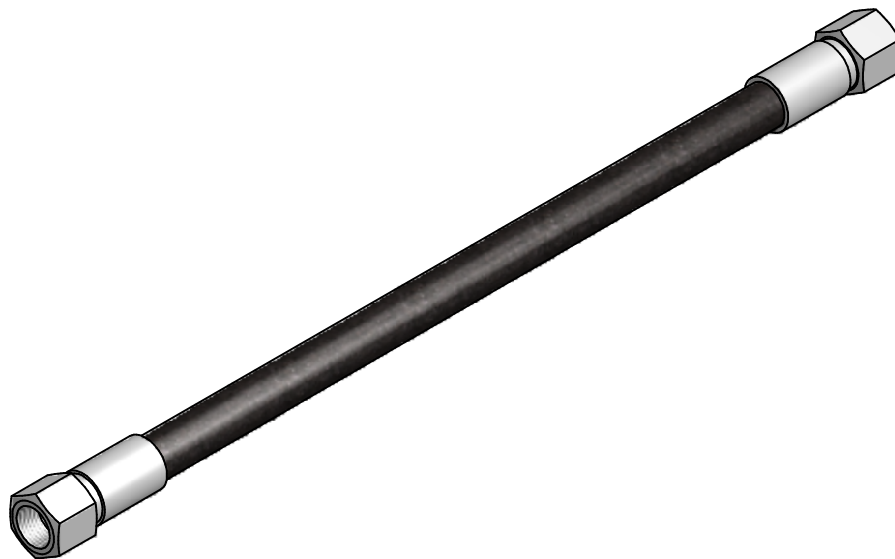


TRIP HOSE

LD18

Reference	Lenght	Hose diameter	Hose type	Max. working pressure	Connector 1	Connector 2
LD18	400 mm.	3/16"	EN 853 15N	250 Bar	G 1/8"	G 1/8"
LD18-500	500 mm.	3/16"	EN 853 15N	250 Bar	G 1/8"	G 1/8"
LD18BP	700 mm.	3/16"	EN 853 15N	250 Bar	G 1/8"	G 1/8"
LD18BPP	2000 mm.	3/16"	EN 853 15N	250 Bar	G 1/8"	G 1/8"

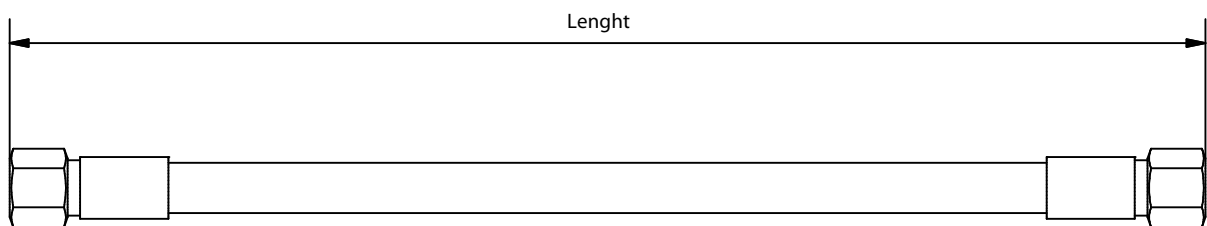

Specifications	
Name	Value
Connectors type	Female with conical seat
Connectors material	Carbon steel
Connectors finish	Plated



Av. Alfonso Peña Boeuf, 6 y 9
 28022 MADRID - ESPAÑA
 TEL: +34 913121656
 FAX: +34 913295820

DATA SHEET

TRIP HOSE

Description: Trigger hoses are used to drive gas from the pilot cylinder to the pneumatic actuators of slaves

Code sheet:	Group sheet:	Reference:	Drawn:	Date:	Revised:	Date:	Review:	Format:
AEX-FTC-02-032	CO2	SEE TABLE	DCM	29/09/2017	MRC	29/09/2017	1	A4

Note: Aguilera Extinción S.L. Reserves the right to modify any of the characteristics stated in this document without notice.