


DISCHARGE HOSE

L34, L114N and L112N

Reference	Length	Hose diameter	Hose type	Max. work pressure	Connector 1	Connector 2
L34	535 mm.	3/4"	EN 853 1SN	140 Bar	G 3/4"	G 3/4"
L114N	600 mm.	1 1/4"	EN 853 2SN	140 Bar	G 1 1/4"	G 1 1/4"
L112N	690 mm.	1 1/2"	EN 853 2SN	140 Bar	G 1 1/2"	G 1 1/2"

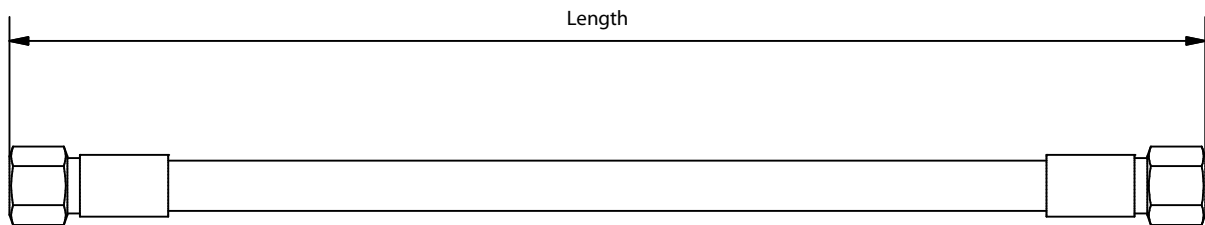

Specifications	
Name	Value
Connectors type	Female thread with conical seat
Connector material	Carbon Steel
Connector finish	Zincked



Av. Alfonso Peña Boeuf, 6 y 9
 28022 MADRID - ESPAÑA
 TEL: +34 913121656
 FAX: +34 913295820

DATA SHEET
 DISCHARGE HOSE

Description: They are used to conduct gas from the container valve to the manifold check valve in batteries and to installation in autonomous cylinders.

Token code:	Family tab:	Reference:	Drawn:	Date:	Reviewed:	Date:	Revision:	Format:
AEX-FTC-61-058	FK-5-1-12	VER TABLA	DCM	04/05/2016	MRC	04/05/2016	1	A4

Note: Aguilera Extinción S.L. reserves the right to modify without prior notice any data or specification reflected in this document.