




BATTERIES OF CYLINDERS OF 67 L (DOUBLE ROW) WITH CONTINUOUS WEIGHING

AEX/SBPx67D

Specifications					
Reference	Nº cylinders	Maximum load*	Total length	Manifold output**	Manifold Reference**
AEX/SBP367D	3	135 Kg.	1069 mm	Male NPT 1"	CC1D3
AEX/SBP467D	4	180 Kg.	1069 mm	Male NPT 1 1/4"	CC114D4
AEX/SBP567D	5	225 Kg.	1409 mm	Male NPT 1 1/4"	CC114D5
AEX/SBP667D	6	270 Kg.	1409 mm	Male NPT 1 1/4"	CC114D6
AEX/SBP767D	7	315 Kg.	1749 mm	Male NPT 1 1/2"	CC112D7
AEX/SBP867D	8	360 Kg.	1749 mm	Male NPT 1 1/2"	CC112D8
AEX/SBP967D	9	405 Kg.	2089 mm	Male NPT 2"	CC2D9
AEX/SBP1067D	10	450 Kg.	2089 mm	Male NPT 2"	CC2D10
AEX/SBP1167D	11	495 Kg.	2429 mm	Male NPT 2"	CC2D11
AEX/SBP1267D	12	540 Kg.	2429 mm	Male NPT 2"	CC2D12
AEX/SBP1367D	13	585 Kg.	2769 mm	Male NPT 2"	CC2D13
AEX/SBP1467D	14	630 Kg.	2830 mm	Flange 2 1/2"	CC212D14I
AEX/SBP1567D	15	675 Kg.	3170 mm	Flange 2 1/2"	CC212D15I
AEX/SBP1667D	16	720 Kg.	3170 mm	Flange 2 1/2"	CC212D16I
AEX/SBP1767D	17	765 Kg.	3510 mm	Flange 2 1/2"	CC212D17I
AEX/SBP1867D	18	810 Kg.	3510 mm	Flange 2 1/2"	CC212D18I
AEX/SBP1967D	19	855 Kg.	3850 mm	Flange 2 1/2"	CC212D19I
AEX/SBP2067D	20	900 Kg.	3850 mm	Flange 2 1/2"	CC212D20I

* The maximum filling density can reach 0.745Kg / L if a maximum temperature of 50°C is guaranteed in the room where the battery is located.

** The collector diameter may vary depending on hydraulic calculations of each installation.

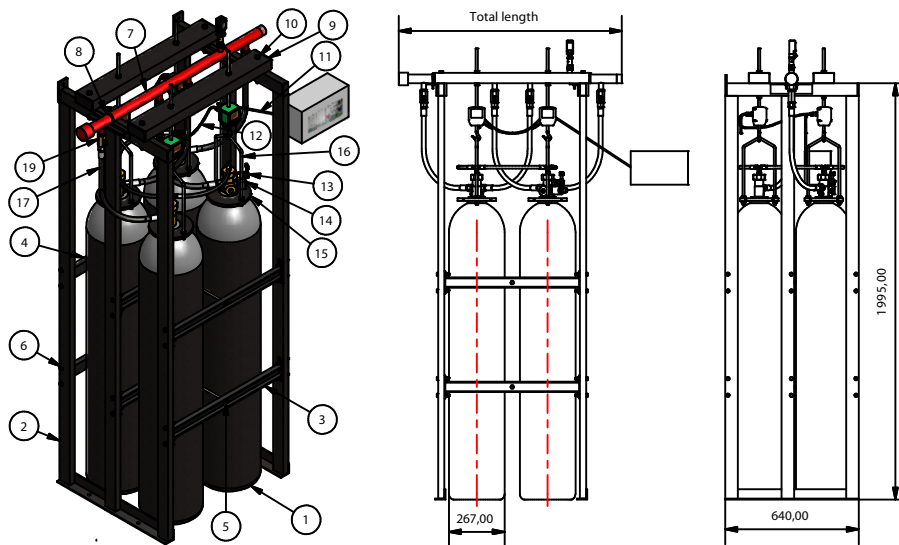

Parts list		Parts list	
Nº Piece	Reference and Description	Nº Piece	Reference and Description
1	BCO67 - Cylinder 67 L	11	AEX/LE - Input microphone hose
2	HP-1995DP - Support feet single row 1995 mm	12	AEX/LU - junction microphone hose
3	HTPA(x) - Preceding crossbar for(x) cylinders	13	AEX/PM160 - Hand lever
4	HTPP(x) - Rear crossbar for (x) cylinders	14	AEX/VS24 - Solenoid valve
5	HVSD - Divider rod	15	BRW80CO-1 - Flange W80
6	TO8M55 - Screws, nuts and washers M8	16	BPAS1 - Slings arc
7	CC(x)D(y) - CO2 manifold (x) inches s/f for (y) cylinders	17	LCO12B-1 - 1/2" Hose for batteries
8	HA(x) - U-bolt support (x) inches	18	AEX/CPC3 - Continuous weighing control
9	HS(x) - Slings support for (x) cylinder	19	AEX/VAR12 - Check valve 1/2"
10	TO10M125 - Screws, nuts and washers M10	20	AEX/CP1 - Pass contactor (optional)



Av. Alfonso Peña Boeuf, 6 y 9
 28022 MADRID - ESPAÑA
 TEL: +34 913121656
 FAX: +34 913295820

DATA SHEET

BATTERIES OF CYLINDERS OF 67 L (DOUBLE ROW) WITH CONTINUOUS WEIGHING

Description: Complete Cylinder Battery, including manual & electric actuator, pressure gauge, hoses, manifold and continuous weighing control.

Code sheet:	Group sheet:	Reference:	Drawn:	Date:	Revised:	Date:	Review:	Format:
AEX-FTC-02-009	CO2	VER TABLA	DCM	03/11/2016	MRC	03/11/2016	1	A4

Note: Aguilera Extinción S.L. Reserves the right to modify any of the characteristics stated in this document without notice.