




# BATTERIES OF CYLINDERS OF 80L (ONE ROW) WITH CONTINUOUS WEIGHING

## AEX/SBPx80

Specifications					
Reference	Nº cylinders	Maximun load	Total length	Manifold output*	Manifold Reference*
AEX/SBP280	2	107.2 Kg.	996 mm	Male NPT 1"	CC1S2
AEX/SBP380	3	160.8 Kg.	1336 mm	Male NPT 1 1/4"	CC114S3
AEX/SBP480	4	214.4 Kg.	1676 mm	Male NPT 1 1/4"	CC114S4
AEX/SBP580	5	268 Kg.	2016 mm	Male NPT 1 1/4"	CC114S5
AEX/SBP680	6	321.6 Kg.	2356 mm	Male NPT 1 1/2"	CC112S6
AEX/SBP780	7	375.2 Kg.	2696 mm	Male NPT 2"	CC2S7
AEX/SBP880	8	428.8 Kg.	3036 mm	Male NPT 2"	CC2S8
AEX/SBP980	9	482.4 Kg.	3379 mm	Male NPT 2"	CC2S9
AEX/SBP1080	10	536 Kg.	3719 mm	Male NPT 2"	CC2S10
AEX/SBP1180	11	589.6 Kg.	4059 mm	Male NPT 2"	CC2S11
AEX/SBP1280	12	643.2 Kg.	4399 mm	Flange 2 1/2"	CC212S12I
AEX/SBP1380	13	696.8 Kg.	4739 mm	Flange 2 1/2"	CC212S13I
AEX/SBP1480	14	750.4 Kg.	5182 mm	Flange 2 1/2"	CC212S14D

\* The collector diameter may vary depending on hydraulic calculations of each installation.

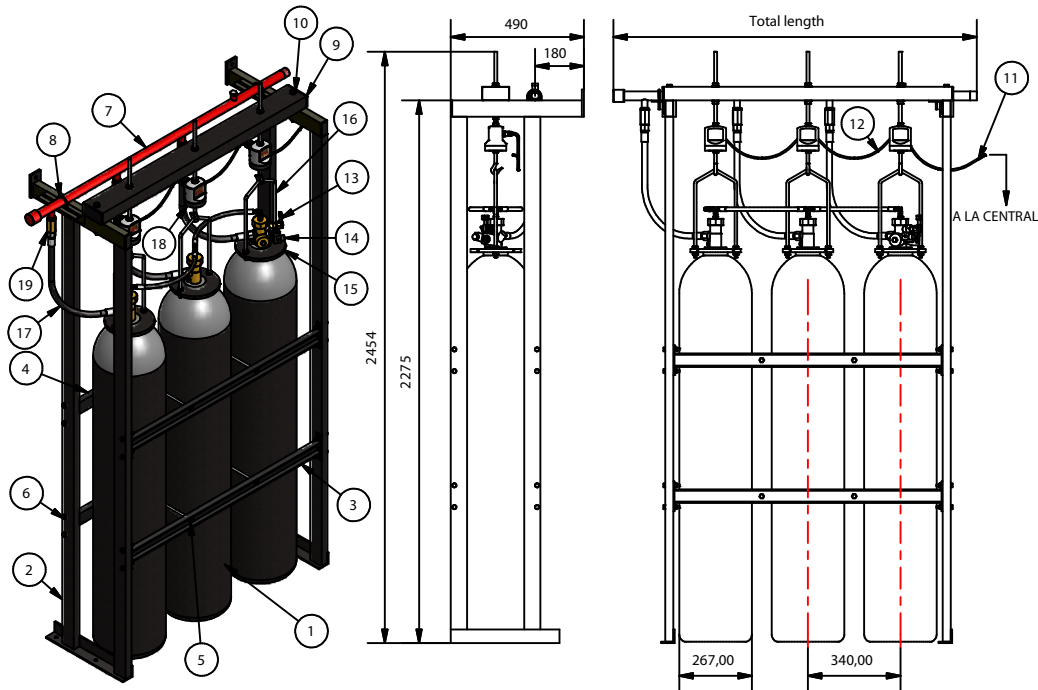

Parts list		Parts list	
Nº Piece	Reference and Description	Nº Piece	Reference and Description
1	BCO80 - Cylinder 80 L	11	AEX/LE - Input microphone hose
2	HP-2100P80 - Support feet single row	12	AEX/LU - junction microphone hose
3	HTPA(x) - Preceding crossbar for(x) cylinders	13	AEX/PM160A - Hand lever
4	HTPP(x) - Rear crossbar for (x) cylinders	14	AEX/VS24 - Solenoid valve
5	HVS - Divider rod	15	BRW80CO-1 - Flange W80
6	TO8M55 - Screws, nuts and washers M8	16	BPAS1 - Slings arc
7	CC(x)S(y) - CO2 manifold (x) inches s/f for (y) cylinders	17	LCO12B-1 - 1/2" Hose for batteries
8	HA(x) - U-bolt support (x) inches	18	AEX/CPC3 - Continuous weighing control
9	HS(x) - Slings support for (x) cylinder	19	AEX/VAR12 - Check valve 1/2"
10	TO10M125 - Screws, nuts and washers M10		

Description: Complete Cylinder Battery, including manual & electric actuator, pressure gauge, hoses and manifold

Code sheet:	Group sheet:	Reference:	Drawn:	Date:	Revised:	Date:	Review:	Format:
AEX-FTC-02-006	CO2	VER TABLA	DCM	29/04/2016	MRC	29/04/2016	1	A4