

TWO OUTPUT MODULE

AE/SA-2S

Description

Units with microprocessor designed to be used with the algorithmic fire detection panels of AGUILERA ELECTRONICA, manage communications and monitor output signals.

Each output can be personalized in the Algorithmic Panel with the name of the location and the operation it performs (except in the AE/SA-32S module), and programmed to act with alarms or events in different pieces of plant equipment.


Module that manages the control of 2 dry contact relays, with contacts normally open and normally closed.

They include:

- * Operation pilot: It indicates it is operating correctly, giving red-colored flashes through the status LED. The flashing frequency depends on whether the equipment is in idle or has an input activated. If the flashing is a nuisance in particular cases, it can be inhibited individually.
- * Removable jacks, to facilitate connection in the field.
- * The circuit's protective case leaves the status LED of the unit visible.
- * Individual identification: Each module is identified individually with a number inside the installation loop. This number is stored in EEPROM memory whereby it is kept even though the module is without power for a long period.



Wiring Schematic

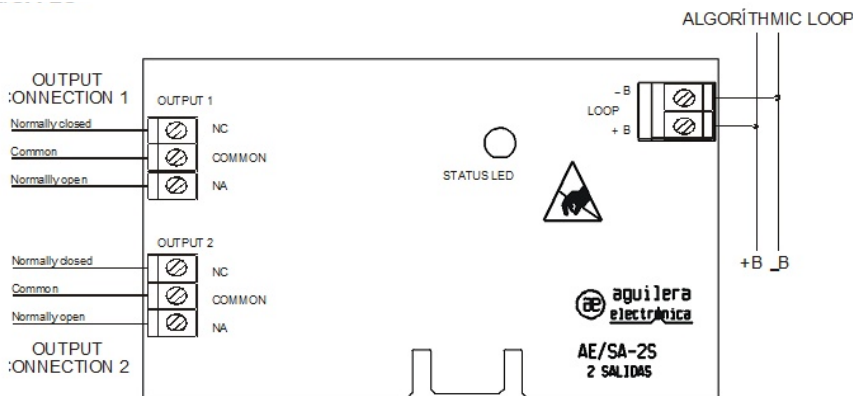

Assembly

For the installation of the modules, open the module cover by pressing on its central part. Secure the module with 4 screws using the fastening holes foreseen for this purpose.

Wiring

Disconnect the supply voltage of the detection loop before installing the module.

- Connect the positive input of the detection loop to the + B terminal.
- Connect the negative input of the detection loop to the - B terminal

TECHNICAL CHARACTERISTICS:

Power supply voltage:	18 ~27 V (AE/SA-CTL Algorithmic loop card).
Consumption when idle:	2.7 mA
Consumption in alarm state:	2.8 mA
Algorithmic loop wiring	2-wire. Recommended cross-section 1.5 mm ² Removable jacks for all connections
Outputs:	Voltage-free contacts. (NA, COMMON, NC)
Relay characteristics:	Maximum resistive load = 1 A / 30 Vdc - 0.5 A / 125 Vac Maximum switching voltage = 125 Vdc - 125 Vac Maximum switching power = 30 W - 125 VA
Temperature range:	0° - +50° C (ambient temperature)
Humidity range:	Relative humidity 10% - 90% without condensation.
Luminous indicator:	Operation pilot: Red flash (can be inhibited).

Casing material:	ABS
Activation:	Red intermittent
Size:	105 x 82 x 25 mm
Fastening:	4 holes, diam. 3.5 mm
Weight:	100 g.

CERTIFICATION

0099/CPD/A74/0094

