

# EN 54-23 FLASH FOR ROOF MOUNTING

## AE/V-AFLXC


### Description

EN 54-23 certified flash for ceiling mounting. With a single lens design that distributes light in a cylindrical shape to achieve the illumination required by EN 54-23. LED technology that guarantees a light intensity of 0.4 lux / m<sup>2</sup> in the entire area.

Designed for installation at a height of up to 3m and with a discreet appearance. This device is ideal for a variety of uses, including bedrooms, bathrooms, and toilets.



### Dimensions

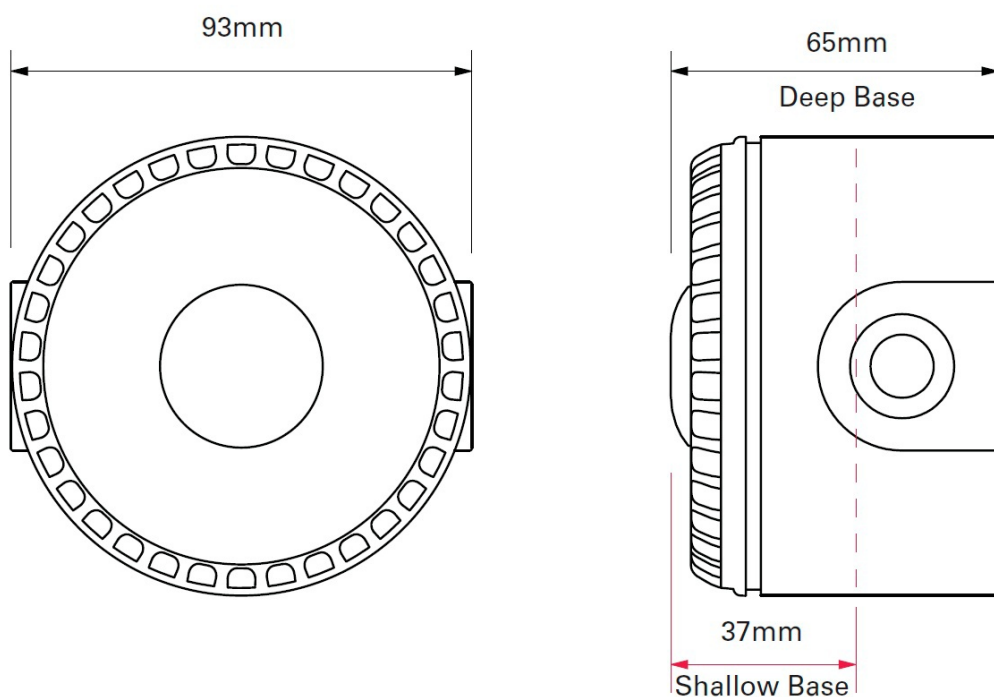

### TECHNICAL CHARACTERISTICS

Voltage:	9 – 60 Vcc
Consumption:	10 – 25mA
Maximum installation height:	3 m
Coverage length:	7,5 m
Coverage volume code:	C-3-7-5
Coverage volume:	132m3(21m3)
Flash frequency:	1 Hz (switchable a 0,5 Hz)
Protection:	IP33 Low base IP65 High base
Temperature range:	-25°C a +70°C
Monitoring:	Reverse polarity
Weight:	100 gr
Colour Housing:	White or Red
Flash color:	White or Red