

FLASH AT 54-23 FOR WALL MOUNTING

AE/V-AFLXW

Description

EN 54-23 certified flash for wall mounting. Led technology that guarantees light intensity.

Characteristics


- Ultra low current consumption of 10mA
- Up to 7.5m of room coverage
- 0.5Hz or 1Hz flash rate
- Change of coverage at 2.5m

Benefits

- Use where current consumption is a key consideration
- Ideal for bedrooms, bathrooms and toilets.
- Change flash speed to 0.5Hz to reduce current consumption
- Reduces energy consumption by up to 50%



Dimensions

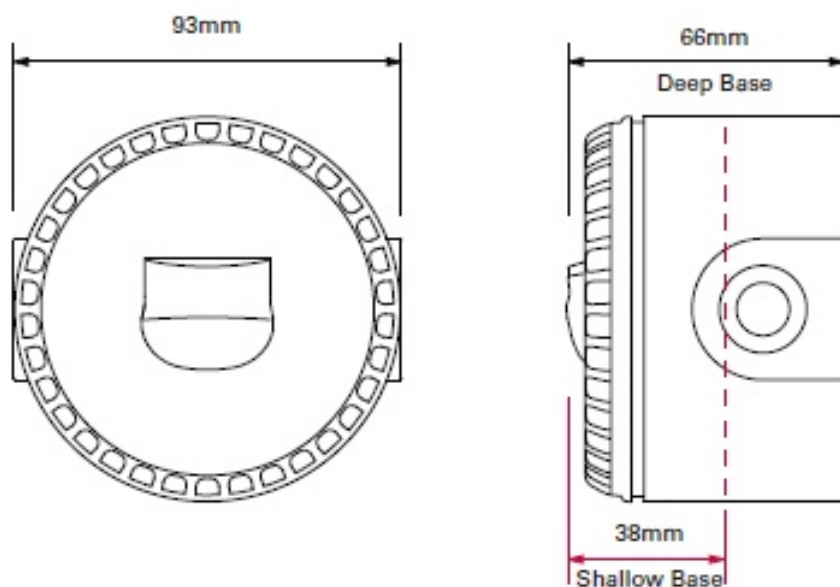

TECHNICAL CHARACTERISTICS

Voltage :	9 - 60 VCC
Consumption:	10 - 25 mA Depends on the position
Maximum installation height:	2,4 m
Coverage length:	7,5 m
Coverage volume code:	W-2.4-7.5
Coverage volume:	135m3(15m3)
Flash frequency:	1 Hz (conmutable a 0,5 Hz)
Protection:	IP65
Temperature range:	-25°C a +70°C
Weight:	100 gr
Color:	Red