

ELECTRONIC SIREN WITH SPOTLIGHT

AE/V-ASFLXW

Description


The AE / ASFLXW siren is ideal for dual-use applications where a visual alarm device is required in addition to an audible alarm.

It is especially recommended for wall use as it only requires one installation point. Ready to use with any standard probe.

EN-3 and EN 54-23 certified for wall mounting.



Dimensions

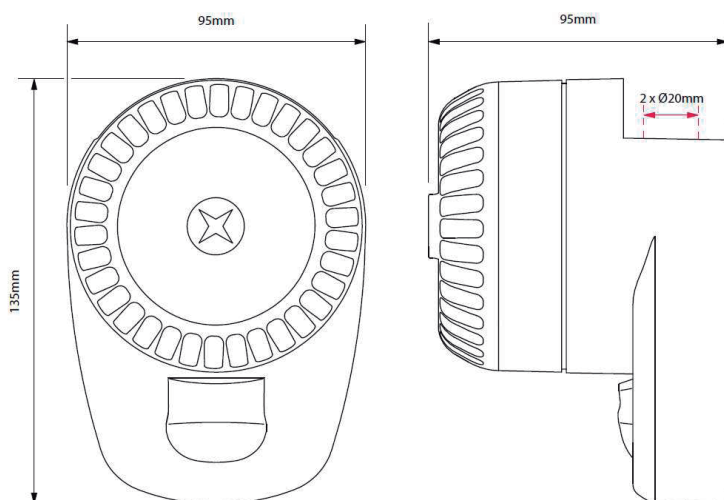

TECHNICAL CHARACTERISTICS

Voltage:	18 - 28 Vdc (Fire Use) 9 - 15 Vdc (Fire Use)
Consumption:	22 - 37mA
Maximum installation height:	2.4 m
Coverage length:	7.5 m
Coverage volume code:	W-2.4-7.5
Volume of coverage:	135m3 (15m3)
Flash frequency:	1 Hz (switchable to 0.5 Hz)
Sound level:	102 dB (A)
Protection:	IP65
Temperature range:	-25°C to + 70°C
Weight:	200 gr
Color	Red