


OUTDOOR USE OPTICAL / ACOUSTIC EXTINGUISHING POSTER AE/V-CEIP

Description

Luminous panel with five high-efficiency LEDs for surface mounting.
Supplied with two adhesive signs: FIRE EXTINGUISHING - FIRE.



Dimensions

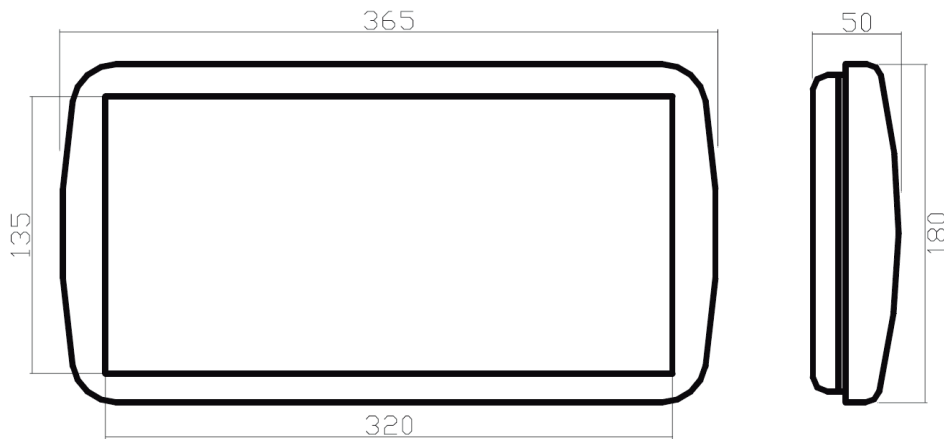

TECHNICAL CHARACTERISTICS

Buzzer: 98 dB at 1m 3200 Hz.
Programming through jumpers.
Connection terminals for section cable: 2.5 mm².
Consumption: 95mA / 24Vdc
Sound Intensity: 108dB / 1m
Polarity reversal protection.
Fuse for power protection.
Light: Flashing or fixed (two alarm levels).
Sound: Intermittent or steady.
Current: constant with variable luminosity.
Power supply: from 10.8 Vdc to 28 Vdc.
Operating temperature: from -10 ° C to + 50 ° C.
Flicker frequency: 1 Hz.
IP: 65
Material: ABS
Dimensions: 365x180x50mm

ELECTRICAL CHARACTERISTICS

Permanent Light / Permanent Sound				
Without Buzzer			With Buzzer	
[V]	[mA]	[W]	[mA]	[W]
13,8	66	0,91	73	1,0
20	58	1,16	84	1,68
27,6	58	1,6	90	2,48

The medium current in flashing mode is half of that shown on the upper list