

# TEST UNIT FOR FLAME DETECTORS

## AE/FL-T2

### Description

The AE/FL-T2 equipment is a test and calibration unit specifically designed to work with the entire range of AE/FL- flame detectors.


It has an intuitive menu in which you only have to choose the type of flame detector you want to test, press the trigger and the equipment will automatically perform the test at a distance of up to 6 meters, which means that in many installations, the Flame detector can be tested from ground level.

This test device recreates the characteristic spectrum of a flame using the combination of UV and IR. Once the test has finished, it allows you to store the results to download them to your PC.

The battery is recharged via USB from a PC or with a charger.



### Dimensions

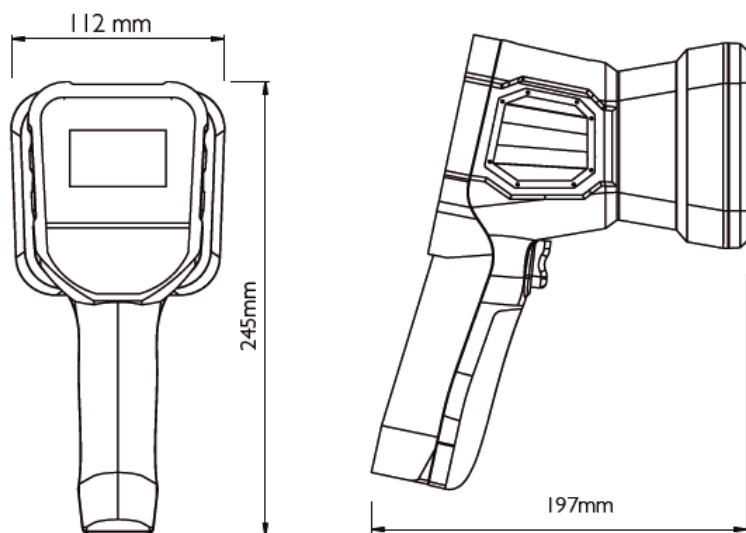

### TECHNICAL CHARACTERISTICS

Compatibility	AE/FL-IR2, AE/FL-IR2EX, AE/FL-IR3, AE/FL-IR3EX, AE/FL-UVIR2, AE/FL-UVIR2EX.
Test time	Up to 40 tests of 30 seconds each
Maintenance interval	2000 tests or 2 years
Batteries	Rechargeable batteries with lithium ions
Battery charging time	3 hours (fast), 8 hours (normal)
Battery charging	via USB type C port
Weight	850g
Dimensions	112(W) x 245(H) x 197(D)mm
Protection Range	Batteries
Working temperature	-10°C to +55°C
Temperature	-20°C to +65°C