

MARINA SERIES OPTICAL SMOKE DETECTOR

AE/M-OPH

Description

Marine Certified Optical Smoke Detector.


Double LED for 360° viewing.

Sleek, low-profile design.

Includes remote indicator output that is activated when the detector enters alarm, with this output secondary equipment such as indicator lights or relay bases.



Dimensions

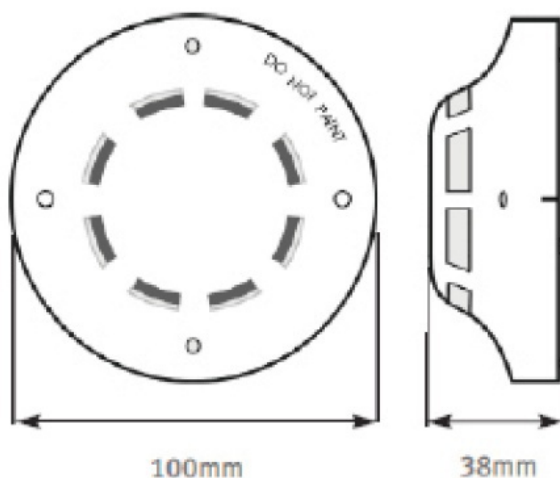

Marine series socket AE/M-BH

Standard base for the marine detector range.

Free of electronics with stainless steel terminals.

Sleek, low-profile design



TECHNICAL CHARACTERISTICS	CERTIFICATIONS	
<p>Power (Voltage): 15 - 30V DC</p> <p>Consumption in standby: 35uA</p> <p>Consumption in alarm: 40mA</p> <p>Degree of protection: IP42</p> <p>Operating temperature: -25 ° C / + 70 ° C</p> <p>Maximum humidity: 95% - No condensation</p>	<p>Certification:</p> <p>Certification Number:</p> 	<p>MED por Germanischer Lloyd (GL)</p> <p>20 278 - 04 HH</p>