

INDUSTRIAL USE SIREN


AE/V-ASIND

Description

High acoustic intensity siren, IP66 protection.

Designed to ensure a safer and easier installation, while providing flexibility with fewer product variants.

Dimensions

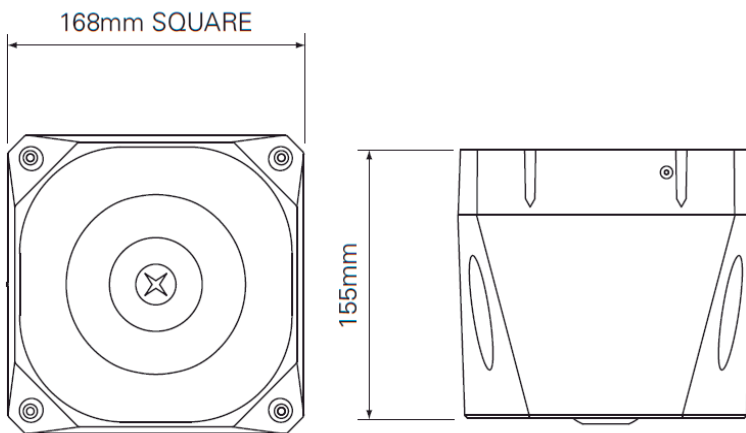

TECHNICAL CHARACTERISTICS

Voltage:	18 - 28Vdc / 115 - 230Vac
Current:	110dB (A) - 105mA @ 24Vdc 120dB (A) - 450mA @ 24Vdc 110dB (A) - 40mA @ 230Vac 120dB (A) - 65mA @ 230Vac
Output:	110dB (A) (typical tone 3) 120dB (A) (typical tone 3)
Shades:	42
Alarm stages:	3
Volume:	10dB (A)
Waiting time:	5 minutes - 40 minutes (user selectable) Reverse polarity monitoring (DC version)
Temperature:	- 25°C to + 70°C
Protection:	IP66
Construction:	ABS
Weight:	1.6Kg (dc version) 2.5 kg (net version)
Color:	Red or gray