FK-5-1-12 CYLINDERS 67 L SINGLE ROW

AEX/FKB067-(xx)

Specifications								
Reference	Cylinders	Maximum load	L1	L2	L3	L4	Manifold outlet*	Manifol reference*
AEX/FKB067-02	2	160,8 Kg	334 mm	730 mm	1100 mm	2070 mm	Thread 2"	CF2S2I067
AEX/FKB067-03	3	241,2 Kg	334 mm	1070 mm	1486 mm	2127 mm	Flange 2 1/2"	CF212S3I067
AEX/FKB067-04	4	321,6 Kg	334 mm	1410 mm	1826 mm	2127 mm	Flange 2 1/2"	CF212S4I067
AEX/FKB067-05	5	402 Kg	334 mm	1750 mm	2185 mm	2145 mm	Flange 3"	CF3S5I067
AEX/FKB067-06	6	482,4 Kg	334 mm	2090 mm	2525 mm	2145 mm	Flange 3"	CF3S6I067
AEX/FKB067-07	7	562,8 Kg	334 mm	2430 mm	2865 mm	2145 mm	Flange 3"	CF3S7I067
AEX/FKB067-08	8	643,2 Kg	334 mm	2770 mm	3235 mm	2191 mm	Flange 4"	CF4S8I067
AEX/FKB067-09	9	723,6 Kg	334 mm	3110 mm	3575 mm	2191 mm	Flange 4"	CF4S9I067
AEX/FKB067-10	10	804 Kg	334 mm	3450 mm	3915 mm	2191 mm	Flange 4"	CF4S10I067
AEX/FKB067-11	11	884,4 Kg	406 mm	3790 mm	4278 mm	2236 mm	Flange 5"	CF5S11I067
AEX/FKB067-12	12	964,8 Kg	406 mm	4130 mm	4618 mm	2236 mm	Flange 5"	CF5S12I067
AEX/FKB067-13	13	1045,2 Kg	406 mm	4470 mm	4973 mm	2266 mm	Flange 6"	CF6S13I067
AEX/FKB067-14	14	1125,6 Kg	406 mm	4810 mm	5313 mm	2266 mm	Flange 6"	CF6S14I067

*The manifold diameter may vary depending on the hydraulic calculations of each installation.

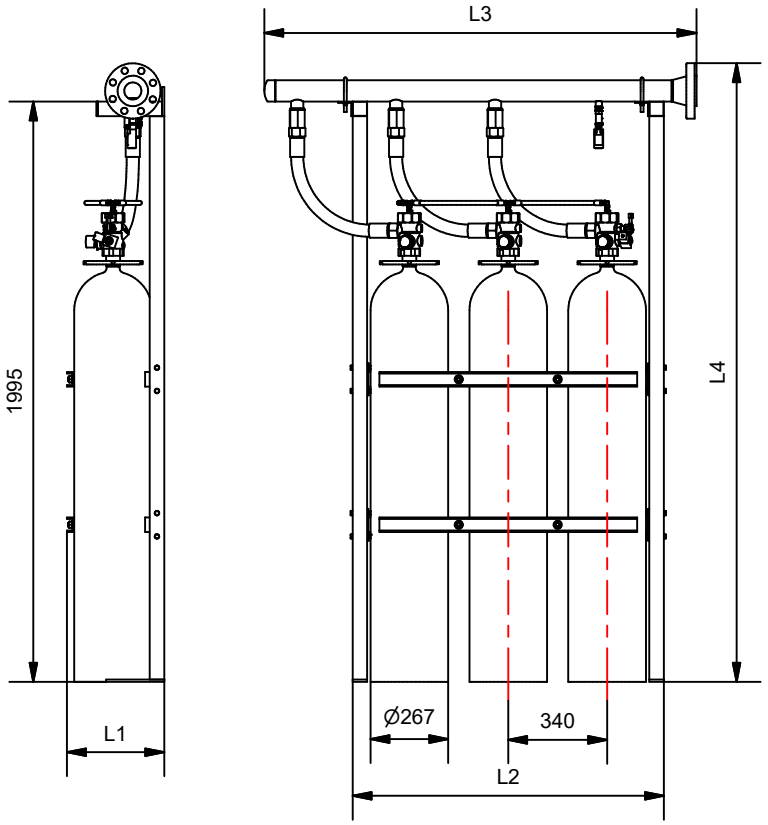

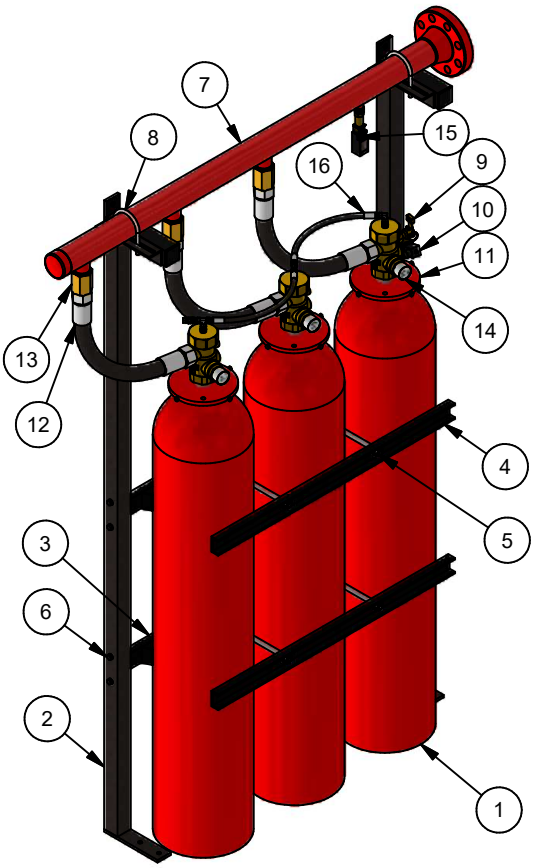

Parts List		Parts List	
Number	Reference and description	Number	Reference and description
1	BFE67 - Cylinder 67 L	9	AEX/PM160A - Manual lever
2	HP-1995 - Single row battery foot	10	AEX/NKVS24 - Solenoid
3	HTP(x) - Rear cross member (x) cylinders	11	BRR112-1 - Flange 1 1/2 " for cylinder
4	HTA(x) - Front cross member (x) cylinders	12	L114N - Flexible hose discharge 1 1/4"
5	HV - Single row battery separator rod	13	AEX/VAR114 - Check valve 1 1/4"
6	TO8M70 - M8 Screws, nuts and washers	14	AEX/FKMCNC42 - Pressure gauge
7	VER TABLA - Manifold	15	AEX/CP1 - Step contactor (optional)
8	HA(x) - Strut (x)"	16	LD18 - Trip Hose 1/8"

aguilera extinción

Av. Alfonso Peña Boeuf, 6 y 9
28022 MADRID - ESPAÑA
TEL: +34 913121656
FAX: +34 913295820

TECHNICAL DATA SHEET

FK-5-1-12 CYLINDERS 67 L SINGLE ROW

Description: Complete cylinder bank, equipped with manual and electric actuator, pressure gauges, hoses and manifold.

Sheet code:	Solution sheet:	Reference:	Drawn:	Date:	Revised:	Date:	Revision:	Format:
AEX-FTC-61-005	FK-5-1-12	AEX/FKB067-(xx)	DCM	12-09-23	ENC	12-09-23	1.1	A4

Note: Aguilera Extinción S.L. reserves the right to modify without notice any data or specification reflected in this document.