BATTERIES OF CYLINDERS OF 120 L (ONE ROW)

AEX/SBFMX120

Specifications						
Reference	Nº of cylinders	Maximum load	Total length	Width	Manifold output*	Manifold Reference*
AEX/SBFM2120	2	276 Kg	1435 mm	430 mm	Flange 3''	CF3S2I120
AEX/SBFM3120	3	414 Kg	1912 mm	430 mm	Flange 4''	CF4S3I120
AEX/SBFM4120	4	552 Kg	2347 mm	430 mm	Flange 4''	CF4S4I120
AEX/SBFM5120	5	690 Kg	2782 mm	430 mm	Flange 4''	CF4S5I120
AEX/SBFM6120	6	828 Kg	3242 mm	502 mm	Flange 5''	CF5S6I120
AEX/SBFM7120	7	966 Kg	3677 mm	502 mm	Flange 5''	CF5S7I120
AEX/SBFM8120	8	1104 Kg	3915 mm	502 mm	Flange 6''	CF6S8I120
AEX/SBFM9120	9	1242 Kg	4350 mm	502 mm	Flange 6''	CF6S9I120
AEX/SBFM10120	10	1380 Kg	4785 mm	502 mm	Flange 6''	CF6S10I120
AEX/SBFM11120	11	1518 Kg	5462 mm	502 mm	2 Flanges 5''	CF5S11B120
AEX/SBFM12120	12	1656 Kg	5897 mm	502 mm	2 Flanges 5''	CF5S12B120

* The collector diameter may vary depending on hydraulic calculations of each installation.

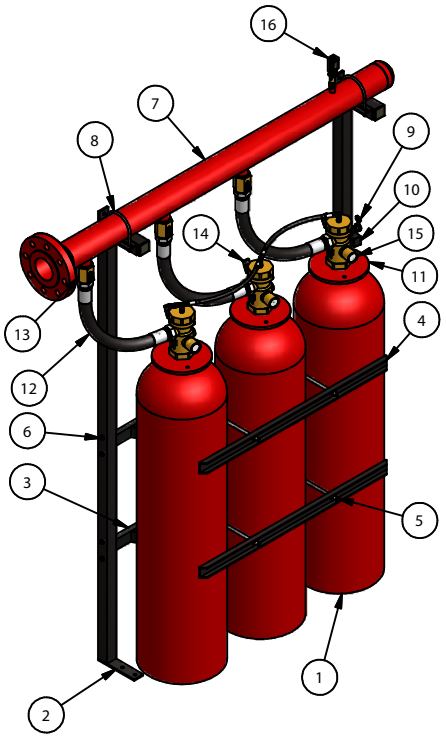

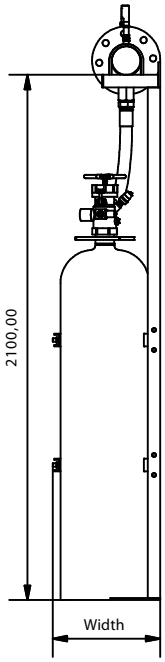

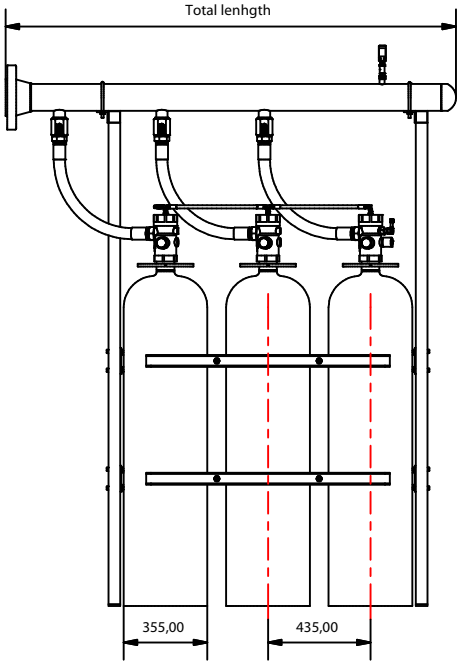

Parts list		Parts list	
Part number	Reference and Description	Part number	Reference and Description
1	BFE120 - Cylindre 120L	9	AEXPM160A - Hand lever
2	HP-2100 - Support feet single row 2100	10	AEX/VS24 - Solenoid
3	HTP(x)120 - Rear crossbar for (x) cylindres	11	BRR212 - Flange 2 1/2'' for cylindre
4	HTA(x)120 - Preceding crossbar for(x) cylindres	12	L112N - Discharge flexible hose 1 1/2''
5	HV120 - Divider rod	13	AEX/VAR112 - Check valve 1 1/2''
6	TO8M70 - Screws, nuts and washers M8	14	AEX/PC - Closed pressure switch with pressure (optional)
7	SEE TABLE - Manifold	15	AEX/M80 - Manometer
8	HA(x) - Strut (x) inches	16	AEX/CP1 - Pass contactor (optional)

aguilera extinción

Av. Alfonso Peña Boeuf, 6 y 9
28022 MADRID - ESPAÑA
TEL: +34 913121656
FAX: +34 913295820

DATA SHEET

BATTERIES OF CYLINDERS OF 120 L (ONE ROW)

Description: Complete Cylinder Battery, including manual & electric actuator, pressure gauge, hoses and manifold

Code sheet:	Group sheet:	Reference:	Drawn:	Date:	Revised:	Date:	Review:	Format:
AEX-FTC-04-011	HFC 227ea	VER TABLA	DCM	24/10/2016	MRC	24/10/2016	1	A4

Note: Aguilera Extinción S.L. Reserves the right to modify any of the characteristics stated in this document without notice