
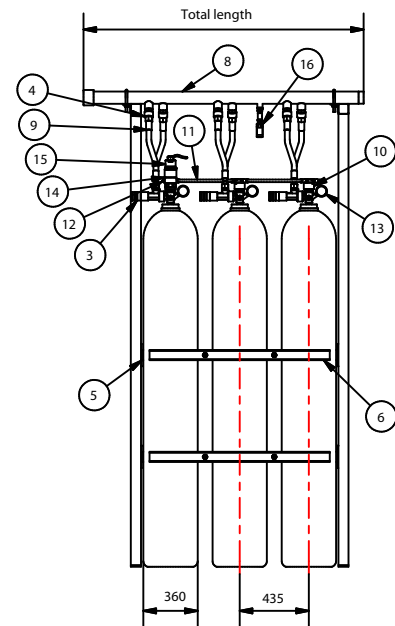


CYLINDERS BATTERY 120 L. DOUBLE ROW IG-55

AEX/IGBD120-XX

Specifications						
Reference	Number of cylinders	Load	Collector Output*	Collector reference	Total length	Height
AEX/IGBD120-04	4	192.88 Kg.	Male NPT 2"	CIG2D4U120140	1239 mm.	2135 mm.
AEX/IGBD120-05	5	241.1 Kg.	Male NPT 2"	CIG2D5U120140	1674 mm.	2135 mm.
AEX/IGBD120-06	6	289.32 Kg.	Male NPT 2"	CIG2D6U120140	1674 mm.	2135 mm.
AEX/IGBD120-07	7	337.54 Kg.	Male NPT 2"	CIG2D7U120140	2109 mm.	2135 mm.
AEX/IGBD120-08	8	385.76 kg.	Flange 2 1/2"	CIG212D8U120140	2157 mm.	2200 mm.
AEX/IGBD120-09	9	433.98 kg.	Flange 2 1/2"	CIG212D9U120140	2592 mm.	2200 mm.
AEX/IGBD120-10	10	482.2 Kg.	Flange 2 1/2"	CIG212D10U120140	2592 mm.	2200 mm.
AEX/IGBD120-11	11	530.42 kg.	Flange 3"	CIG3D11U120140	3042 mm.	2220 mm.
AEX/IGBD120-12	12	578.64 Kg.	Flange 3"	CIG3D12U120140	3042 mm.	2220 mm.
AEX/IGBD120-13	13	626.86 kg.	Flange 3"	CIG3D13U120140	3477 mm.	2220 mm.
AEX/IGBD120-14	14	675.08 Kg.	Flange 3"	CIG3D14U120140	3477 mm.	2220 mm.
AEX/IGBD120-15	15	723.3 Kg	Flange 3"	CIG3D15U120140	3912 mm.	2220 mm.
AEX/IGBD120-16	16	771.52 Kg	Flange 3"	CIG3D16U120140	3912 mm.	2220 mm.
AEX/IGBD120-17	17	819.74 Kg	Flange 4"	CIG4D17U120140	4378 mm.	2262 mm.
AEX/IGBD120-18	18	867.96 Kg	Flange 4"	CIG4D18U120140	4378 mm.	2262 mm.
AEX/IGBD120-19	19	916.18 Kg	Flange 4"	CIG4D19U120140	4813 mm.	2262 mm.
AEX/IGBD120-20	20	964.4 Kg	Flange 4"	CIG4D20U120140	4813 mm.	2262 mm.

* The collector diameter can vary depending on the hydraulic calculations of each installation. This may have a slight impact on overall dimensions.
 repercutir ligeramente en las dimensiones totales.

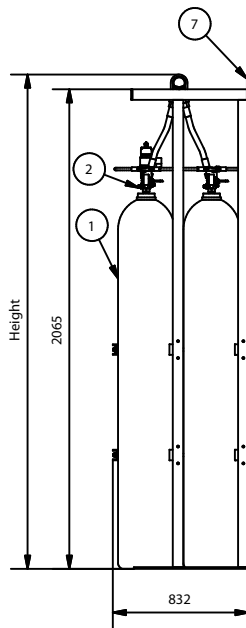

Parts List		Parts List	
Part	Reference and Description	Part	Reference and Description
1	AEX_S-IGB120C - Bottle 120 L IG55	9	AEX-IGL34 - Discharge hose
2	AEX-IGV - Discharge valve	10	AEX-FKAN - Pneumatic actuator
3	AEX-IGR60 - Pressure regulator	11	AEX-IGLM12 - Trip hose
4	AEX-IGVR1 - Retention valve	12	AEX-FKVA - Relief valve
5	HTPFE(x)120 - Rear crossbar	13	AEX-IGMCNC300 - Contact manometer
6	HTA(x)120 - Previous crossbar	14	AEX-IGAE - Electric actuator
7	HP-2065D - Battery foot double row	15	AEX-FKAM - Manual actuator
8	CIG(x)D(y)U080 - Collector	16	AEX-CP1 - Pass contactor (optional)



Av. Alfonso Peña Boeuf, 6 y 9
 28022 MADRID - ESPAÑA
 TEL: +34 913121656
 FAX: +34 913295820

DATA SHEET

CYLINDERS BATTERY 120 L. DOUBLE ROW IG-55

Description: Complete cylinder bank, equipped with manual and electric actuator, pressure regulators, contact pressure gauges, hoses and manifold. Possibility of anchoring both to the ground and to the wall.

Code data sheet:	Group data sheet:	Reference:	Drawn :	Date:	Revised:	Date:	Review:	Format:
AEX-FTC-09-055	IG-55	SEE TABLE	DCM	16/02/2021	ENC	16/02/2021	1	A4